

Michael Reimers
Vice President of Marketing,
Food Radar Systems AB

Seriously safe:

How a pioneering Swedish company is taking the detection of foreign bodies to the next level

When food is contaminated with foreign bodies, everyone loses, including the consumer, the retailer and the producer. The very real threat this poses to your customers, and to your business, makes this no laughing matter. Food Radar Systems AB of Sweden is taking the fight against food contamination to a whole new level, detecting types of foreign bodies that are invisible to traditional detection methods.

Although detection technologies have come a long way during the last few years, low-density foreign bodies such as plastic, wood, and fruit stones are still invisible to all established

detection systems – this is something that Food Radar Systems decided to change.

The LOOK100® is the latest weapon in the arsenal of safety technology, and is a sensor

system designed for emulsions and pumpable products. The LOOK100® has the capability of detecting not only the denser foreign bodies (i.e., metal, stone and glass) but is particularly suited to foreign bodies such as wood, plastic, bone, extraneous vegetable matter, and even insects that, up to now, have gone undetected and straight to the consumer.


Why consider this new technology?

1. Safety first.

A piece of hard plastic, which can be easily detected and removed by the LOOK100®, can be as dangerous to consumers as a piece of glass. The protection your business will enjoy extends also to soft plastic (e.g. plastic bags), wood, pits and virtually all non-dense foreign bodies.


2. Quality and control.

Even lumps of the food product itself (such as lumps of starch, spices, pasta or rice) can be

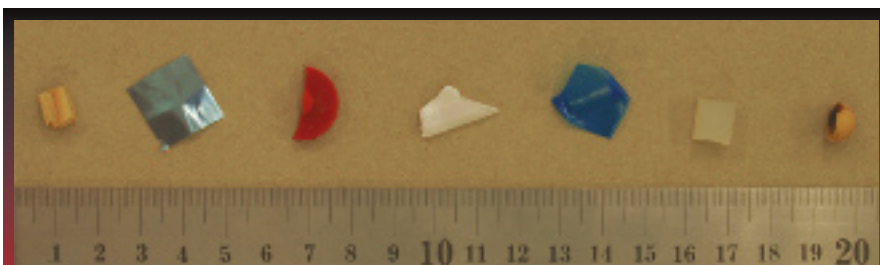

Low density foreign bodies such as pit fragments, plastic foil, rubber, hard plastic, soft plastic, silicone and wood

detected and removed with no fuss. This technology can help safeguard the quality of product and the control over your manufacturing process.

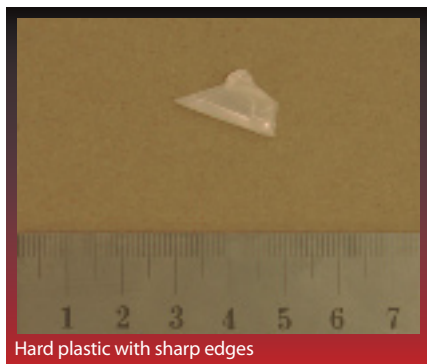


Hard plastic with sharp edges

3. Legal compliance.

All food manufacture is covered by the Food Safety Act (1990). The Act states that if food is contaminated by foreign bodies, or in some other way falls short of the standard demanded by the purchaser, the seller will have committed an offence. The Act also permits a defence against prosecution based on taking 'all reasonable precautions' to prevent such occurrences. The LOOK100® is a way of staying at the cutting-edge of quality assurance.

4. Its just good business.

Any incidence of foreign body contamination is damaging to both the manufacturer and retailer. It can damage trust in the brand, and the cost in time and money of legal proceedings can be vast.

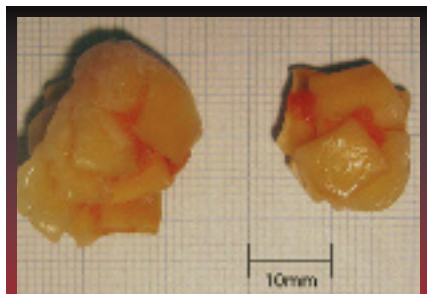

Pasta boiled together, rejected in a baby food process

All system components are hygienically contained in stainless steel cabinets, which are IP67 classified or higher. The sensor does not have any moving parts, and the rejection unit is a three-way valve, which has been certified by the European Hygienic Engineering & Design Group. The entire system takes up about one metre of pipe length and is, therefore, very convenient and easy to install.

The operator panel consists of a computer with a touchscreen interface. There is no need to calibrate the system for all your different products. It is normally enough with just two

"We find this technology very interesting for helping to eliminate low density foreign matter, in particular plastics, thereby further ensuring the quality of the product we deliver to our consumers"
Michael Philp,
European Process Improvement Manager,
H.J. Heinz


product group categories: smooth or particulate. The system is very user-friendly and the operator only needs to choose the right product group setting.

The sensor unit consists of two parts (which are both inside the cabinet), a sensor head and a specially developed industrialised vector network analyser, called MTRX.

The MTRX is controlled by the computer and generates a microwave signal. This microwave signal is then fed to the sensor head.


The sensor head is a piece of 2.5 inch acid resistant stainless steel pipe, with eight hygienically sealed slots, through which the microwaves are transmitted and received.

The system measures the dielectric properties of the food flow and, if an object differs from the norm, it is detected and rejected from the flow.

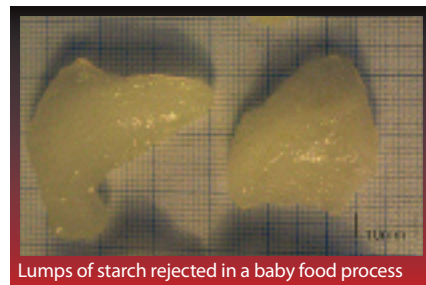

Lumps of starch rejected in a baby food process

The received microwave signal is digitised in the MTRX, and the measurement data is sent to the computer for processing. If an object is detected, the flow speed of the object is calculated and the computer sends this information back to the MTRX. The MTRX controls the exact timing of the signals to the pneumatic rejection unit, thus ensuring successful rejection of the contaminant. The information is then logged by the system,

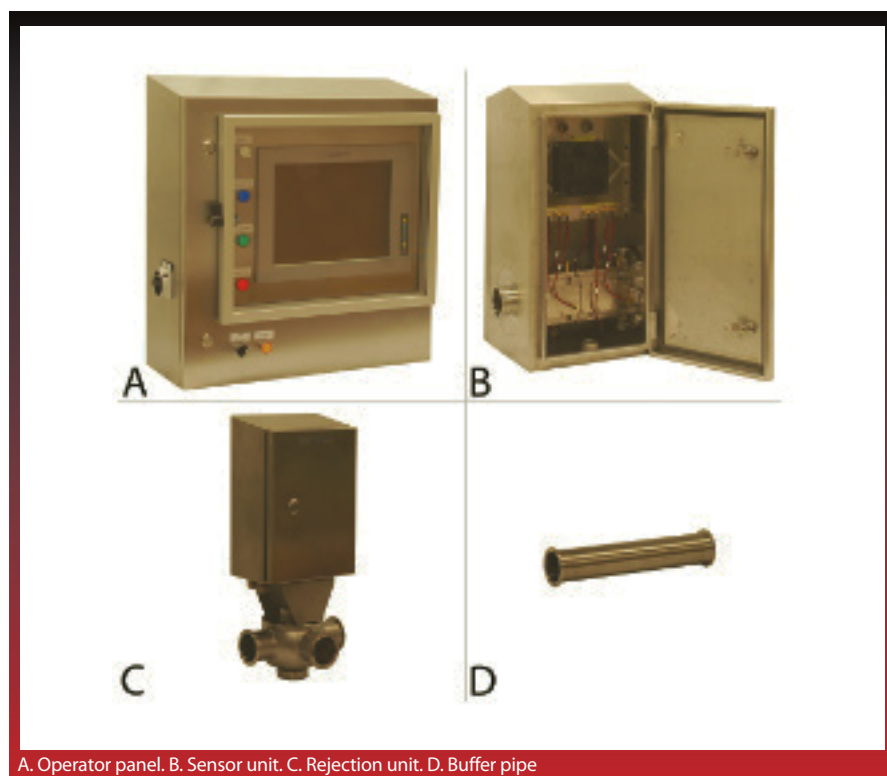


A. Operator panel. B. Sensor unit. C. Rejection unit. D. Buffer pipe

How it all works

The technology is based on a unique and patented technique that uses microwaves to detect foreign bodies. The detection system is designed for clean-in-place (CIP) and consists of four parts:

- A. An operator panel
- B. A sensor unit
- C. A rejecter (valve) unit
- D. A buffer pipe

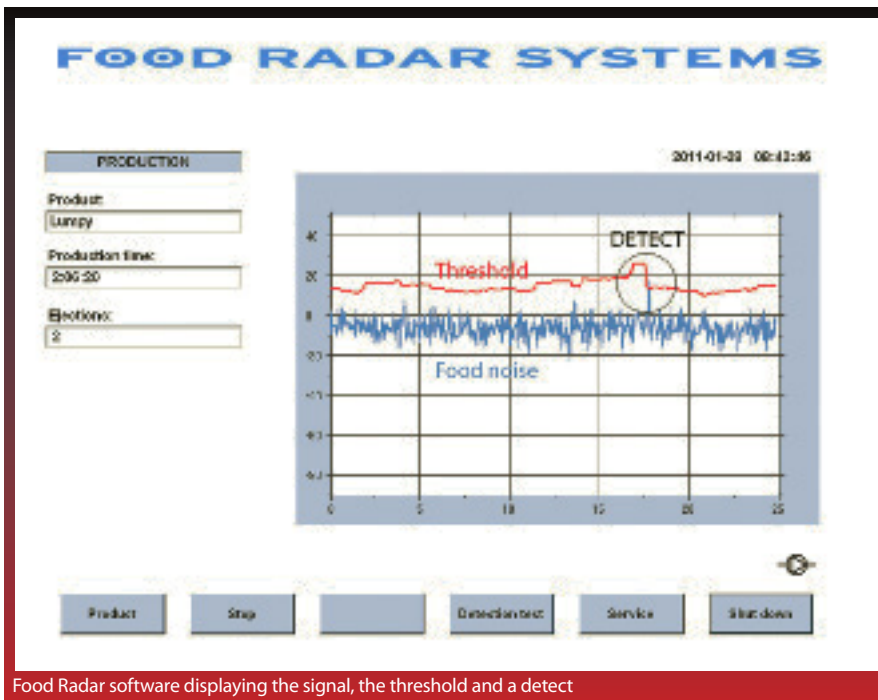

Food Radar software displaying the signal, the threshold and a detect

which can also e-mail a daily report to selected recipients.

The buffer pipe, located in between the sensor unit and the rejection unit, is optimised in length to ensure that the calculations can be performed in time and that the rejection unit is allowed enough time to open. The speed of the foreign object is measured and the eject signal is precisely defined, no matter if it is travelling at the centre or towards the outer edge of the flow, which have very different speeds. The rejection opening time is optimised to ensure that the foreign body is ejected with minimal loss of product (only about two litres).

Is it safe?

An important question with a simple answer: yes, this is a safe technology, causing absolutely no damage to humans or the food being analysed.

Microwaves are electromagnetic waves with a frequency of typically between 1000 MHz (1 GHz) and 100 GHz. This is the same frequency at which microwave ovens and mobile phones work. The transmitted power level from the LOOK100® is in the order of 0.001 W (one one-thousandth of a watt), and this is up to 1,000 times lower than the wattage emitted by a

mobile phone. Compared to a microwave oven, the emissions of the LOOK100® are between five hundred thousand to one million times lower.

Furthermore, the food being exposed to microwaves from the LOOK100® is sealed inside a pipe. As water attenuates microwaves efficiently, the radiation that could possibly escape the pipe is extremely small and almost not measurable. Hence, the microwaves cause no heating of the food as it is pumped through the pipe system.

In summary, the microwave level used by LOOK100® is well within all safe levels.

Born in the industry!

The idea for the LOOK100® really grew out of an industry need.

In the early 2000s, dialogues with major food companies increasingly highlighted the problem of undetectable objects, due to such causes as the growing usage of plastics in the industry. In response, SIK (The Swedish Institute for Food and Biotechnology) started a joint industrial project to address the growing problem of 'undetectable' foreign bodies. SIK had several years of microwave knowledge in-house and was located in Gothenburg, Sweden – one of the world's real hubs of microwave technology experts. As a result, SIK enjoyed full access to world-class technology companies and specialists, including academia, who could help assess the concept.

The idea of a unique detection technology using microwave sensors soon created great

"It is always enjoyable and interesting to meet the experienced quality specialists that come to Food Radar to test their products on our equipment. When they see objects such as soft blue plastic film being detected and instantly removed, we get some very excited smiles."

Mikael Reimers,
Vice President of Marketing,
Food Radar Systems AB

The system naturally monitors all functions and, should anything fall outside the norm, it will log the fault and alert the operator. It can also be remotely controlled via the Internet for monitoring and also to handle customer support issues.



Pilot plant at Food Radar Systems in Gothenburg, Sweden

enthusiasm amongst the industry experts linked to the project. In 2003, SIK brought in external investors and Food Radar Systems AB was established as commercial company. The objective was to develop the technology and a system suited to the needs of the industry. In 2007, a prototype of a pipe sensor was tested and, in 2009/2010, the company started to actively market its system towards certain applications.

Baby food taking the initiative

Food Radar Systems has installed the LOOK100® at several global baby food producers. It seems predictable that the baby food industry would be the first to adopt this new technology, as these manufacturers want, as much as any other company, to clearly demonstrate that they have taken all reasonable precautions against foreign bodies getting into their product. One company that has invested in multiple systems is H.J. Heinz. "We find this technology very interesting for helping to eliminate low density foreign matter, in particular plastics, thereby further ensuring the quality of the product we deliver to our consumers" says Michael Philp, European Process Improvement Manager, H.J. Heinz.

Manufacturers of fruit products have also identified the benefits this technology offers; not least because of the system's ability to detect pits and fragments. Manufactures of spreads,

soups and sauces are also taking a closer look at the benefits offered by the LOOK100®.

See for yourself!

In order to allow manufacturers to see for themselves how the system will work for them,




Customers can test their own products by inserting their own foreign bodies in the pilot plant

they are able to test it at Food Radar Systems' pilot plant in Gothenburg, even bringing with them their own product to test. This pilot plant is frequently visited by customers prior to making investment decisions.

'Plug and play'

One of the great benefits is that the system really doesn't need any floor space and does not make a footprint. It can be installed somewhere along the normal pipe, high or low at a suitable location somewhere before the filler. High-pressure air for the valve, water and power can all be arranged prior to installation. It is also practical to cut the production pipe at a convenient time before the unit has been delivered and install a temporary pipe section matching the system length. When installation is ready to commence, that section is removed and the unit is in place within 5 – 10 minutes.

The end result is an installation that does not interrupt production. Even while production is ongoing, the final connections (power etc.) to the system can be done. It is as close to 'plug and play' as you can get when it comes to detection systems. The sensor unit, buffer pipe and rejection unit are installed at the pipe section, and the operator panel is positioned in the vicinity.

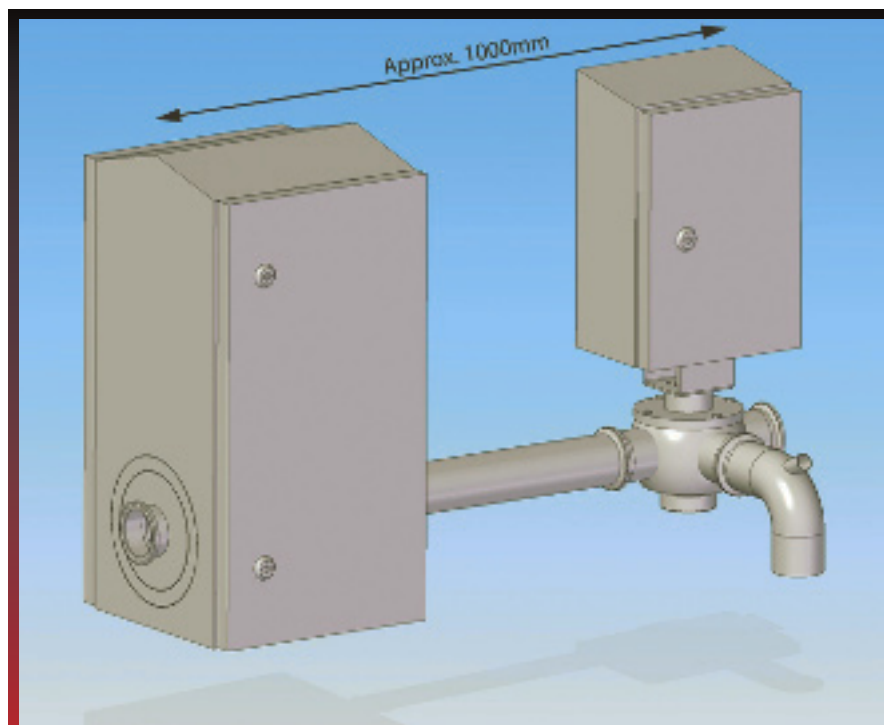

The system requires only one metre of a pipe section – there is no footprint

"In addition to the unique capability of detecting wood, plastic, and even insects, the ability to detect organic faults is another benefit that our customers have difficulty in believing...until they see the system in operation."

**Sven G. Bodell,
President,
Food Radar Systems AB**

A new option

The LOOK 100® certainly gives quality assurance managers something extra to think about. What was previously considered an unbridgeable gap in foreign body detection has been closed by Food Radar Systems' new microwave technology. It seems highly probable that, with the advent of the LOOK100®, manufacturers and consumers alike can look forward to a future with fewer episodes of food contamination.

www.foodradar.com